



DICE 300 - 500 CM





TECHNICAL DATA

STANDARD VERSION

Span	300 cm	400 cm	500 cm
Side height	300 cm	300 cm	300 cm
Ridge height	350 cm	355 cm	360 cm
Roof pitch	300 cm	400 cm	500 cm
Longest component	300 cm	400 cm	500 cm
Main profile	94 x 48 x 3 / 110 x 68 x 3 mm	94 x 48 x 3 / 110 x 68 x 3 mm	94 x 48 x 3 / 110 x 68 x 3 mm
Corner connection	Internal eaves	Internal eaves	Internal eaves

Attachment option	The cube tent DICE can be extended to any length and shape by gutters with other tents of the same type ( up to 75m² )
Hint	In this type of tent, an adjustment of the side posts of about 10 cm for height adjustment is possible
Special design	Elimination of anchorage by installation of steel aluminum floor with ballast
Floor	<ul style="list-style-type: none"> <li>· Wood floor with timber or steel-aluminum substructure</li> <li>· Cassette floor</li> <li>· Compact floor</li> </ul>
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204

DICE 300/300/350 & 400/300/355 & 500/300/360

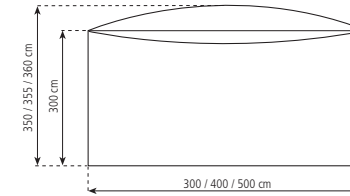

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.

