

PARTY TENT BODEGA 300 - 400 CM



TECHNICAL DATA

STANDARD VERSION

| Span | 300 cm | 400 cm |
|---------------------------------|--|---|
| Side height | 229 cm | 229 cm |
| Ridge height | | 306 cm |
| Bay distance / grid | | 300 cm |
| Main profile | 81 x 48 x 3 mm or optional 94 x 48 x 3 mm | 81 x 48 x 3 mm or optional 94 x 48 x 3 mm |
| Gable uprights | | 0 |
| Max. wind speed according to EN | 80 km/h | |
| Special version | Elimination of wind cross-wiring by installation of portals | |
| Floor | Wood floor with timber or steel-aluminum substructure Cassette floor Compact floor | |
| Tarpaulin | RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204 | |












www.roder.com

RÖDER | P-TENTS

PARTY TENT BODEGA 300/229/275 & 400/229/306



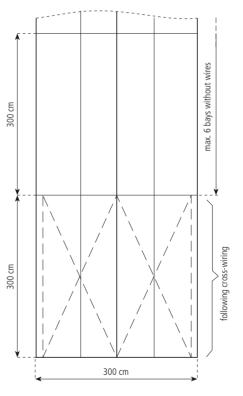

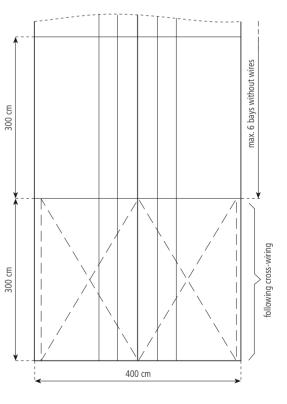

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Röder team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.