
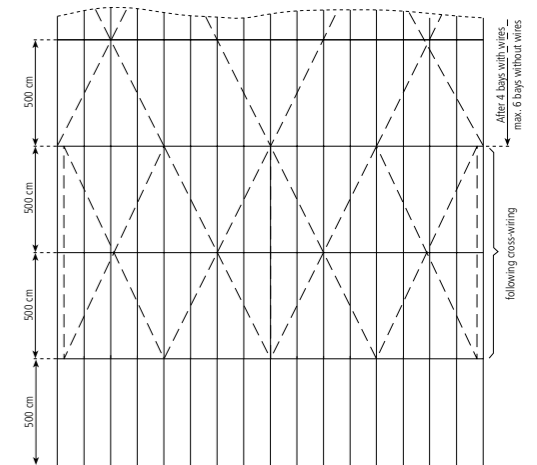
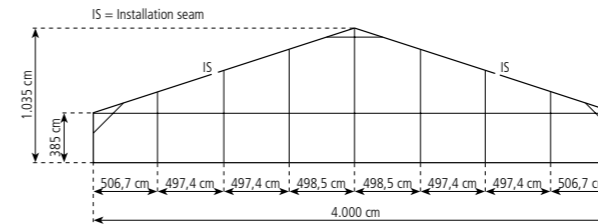


TECHNICAL DATA



BIG TENT 4.000 - 6.000 CM

STANDARD VERSION			
Span	4.000 cm	5.000 cm	6.000 cm
Side height	385 cm	385 cm	385 cm
Ridge height	1.035 cm	1.200 cm	1.360 cm
Roof pitch	18°	18°	18°
Bay distance / grid	500 cm	500 cm	500 cm
Longest component	1.055 cm	1.067 cm	1.360 cm
Main profile	285 x 124 x 7,5/5,2 mm	350 x 124 x 10/6 mm	355 x 124 x 12/5 mm
Gable column	7	9	11
Corner connections	Gusset plate connections with corner and ridge brace		
Min. setup length	5.000 cm	4.000 cm	4.000 cm
Max. setup length	Expandable with the grid		
Max. wind speed according to EN	110 km/h		
Flooring	<ul style="list-style-type: none"> • Wood floor with timber or steel-aluminum substructure • Cassette flooring • Heavy duty floor 		
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204		



4.000/385/1.035



5.000/385/1.200

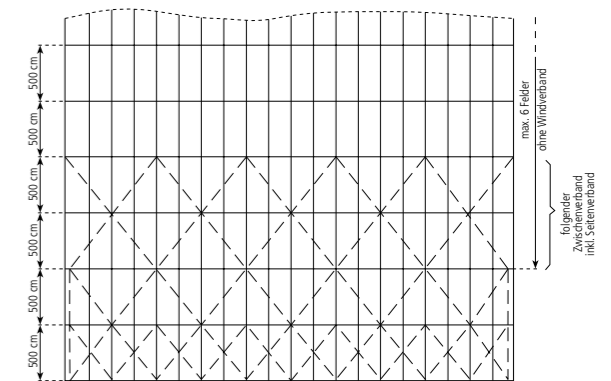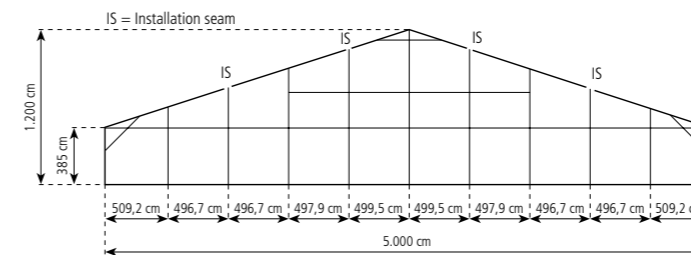

6.000/385/1.360

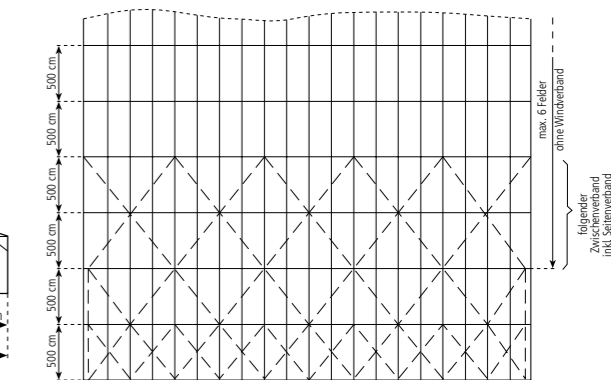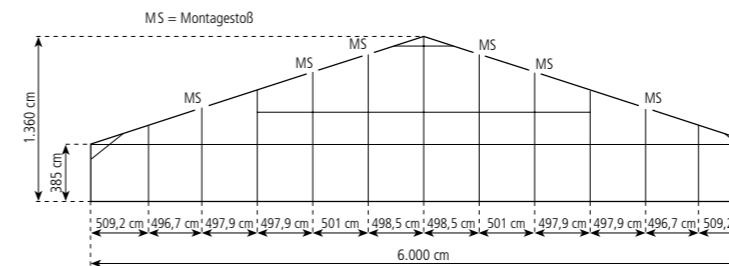

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.