


BIG TENT WITH HIGH POINT 1.500 - 2.000 CM

TECHNICAL DATA


STANDARD VERSION

Span	1.500 cm	1.500 cm	2.000 cm	2.000 cm	2.000 cm
Side height	240 cm	300 cm	240 cm	300 cm	400 cm
Ridge height	480 cm	540 cm	565 cm	625 cm	725 cm
High point	811 cm	868 cm	860 cm	920 cm	1.020 cm
Roof pitch	18°	18°	18°	18°	18°
Bay distance / grid	500 cm	500 cm	500 cm	500 cm	500 cm
Longest component	800 cm	800 cm	1.070 cm	1.070 cm	1.070 cm
Main profile	220 x 100 x 3/4 mm		220x100x4 mm		
Gable column	2	2	3	3	3
Corner connections	Sliding connection		Sliding connection with corner brace		
Min. setup length	2.000 cm	2.000 cm	2.000 cm	2.000 cm	2.000 cm
Max. setup length	Expandable with the grid				
Max. wind speed according to EN	100 km/h				
Flooring	<ul style="list-style-type: none"> Wood floor with timber or steel-aluminum substructure Cassette flooring Compact floor (only at 1.500 cm) 				
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204				

1.500/240/480 & 1.500/300/540

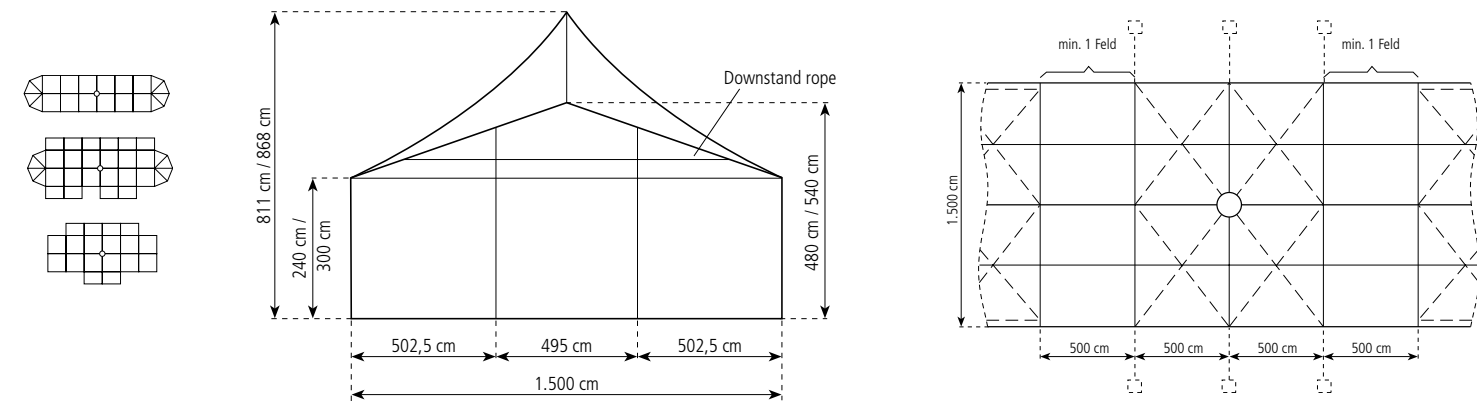

2.000/240/565 & 2.000/300/625 & 2.000/400/725

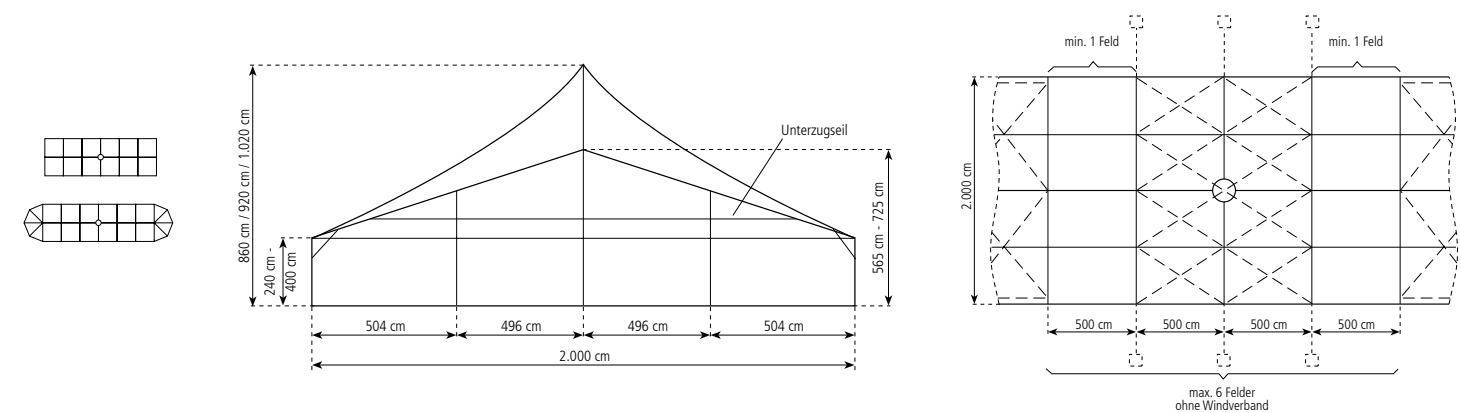

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.