


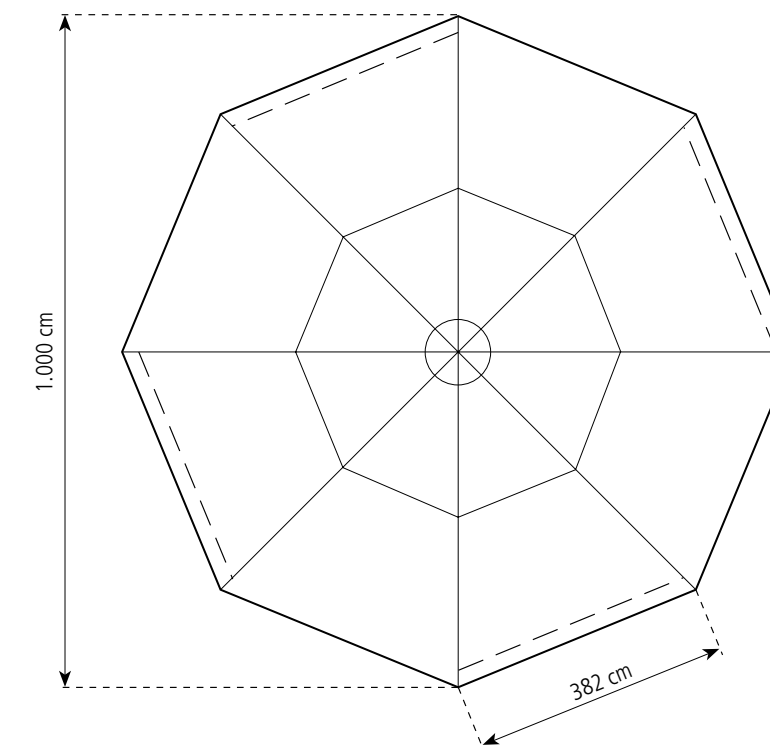
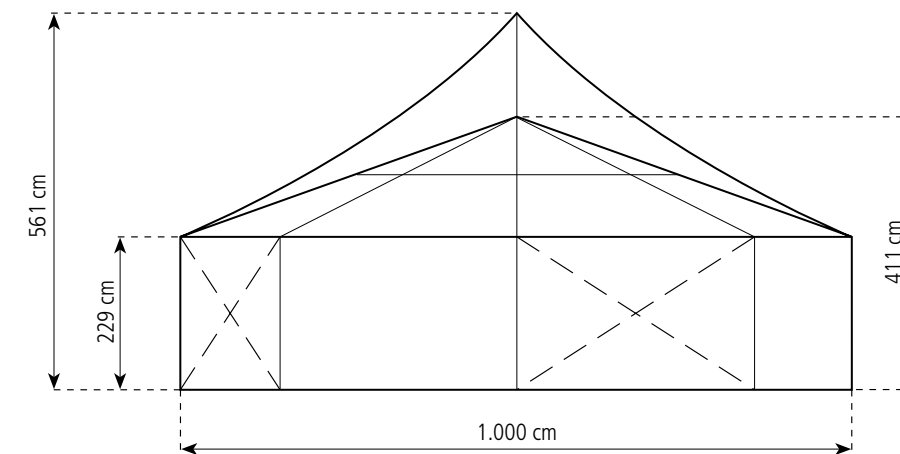

**TECHNICAL  
DATA**

## OCTAGONAL

**STANDARD VERSION**

Span	1.000 cm
Side height	229 cm
Side length	382 cm
Ridge height pavilion roof	411 cm
Ridge height membrane roof	561 cm
Roof pitch	20°
Covered area	70,2 m <sup>2</sup>
Longest component	540 cm
Main profile	94 x 48 x 3 mm
Corner connections	Stem bolts
Max. wind speed according to EN	80 km/h
Special design	Elimination of wind cross-wiring by installation of portals
Attachment option	Can be used as pavilion roof with intermediate fields (see Party tent 1.000/229/411)
Floor	<ul style="list-style-type: none"> <li>Wood floor with timber or steel-aluminum substructure</li> <li>Cassette floor</li> <li>Compact floor</li> </ul>
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204

### 1.000/229/411



### QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.