



TECHNICAL DATA

SOLUTION CLASSIC



STANDARD VERSION

	1.000 cm	1.500 cm	2.000 cm	2.500 cm	3.000 cm
Span	1.000 cm	1.500 cm	2.000 cm	2.500 cm	3.000 cm
Side height	400 / 600 cm	400 / 600 cm	400 / 600 cm	400 / 600 cm	400 / 600 cm
Ridge height	448 / 648 cm	469 / 669 cm	494 / 694 cm	515 / 715 cm	534 / 734 cm
Roof pitch	5°	5°	5°	5°	5°
Bay distance / grid	500 cm	500 cm	500 cm	500 cm	500 cm
Longest component	560 / 615 cm	813 cm	1.055 cm	1.055 cm	1.055 cm
Main profile	250 x 120 x 5/4 mm			285 x 124 x 7,5/5,2 mm	
Gable column	1	2	3	4	5
Corner connections	Clevic-plate connection with corner strut				
Min. setup length	1.000 cm	1.000 cm	1.500 cm	1.500 cm	1.500 cm
Max. setup length	Expandable with the grid				
Max. wind speed according to EN	110 km/h				
Floor	<ul style="list-style-type: none"> Wood floor with timber or steel-aluminum substructure Cassette floor Heavy-duty floor 				
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204				



1.000/400/448 & 1.000/600/648

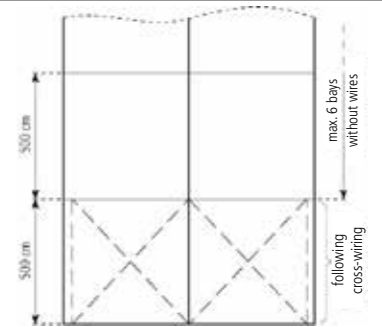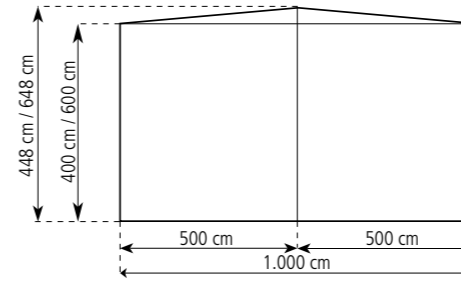



1.500/400/469 & 1.500/600/669

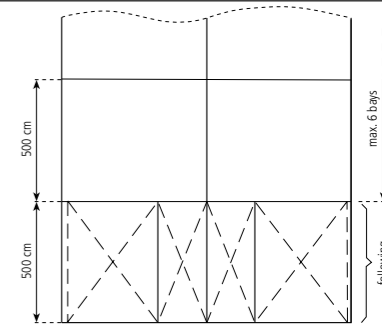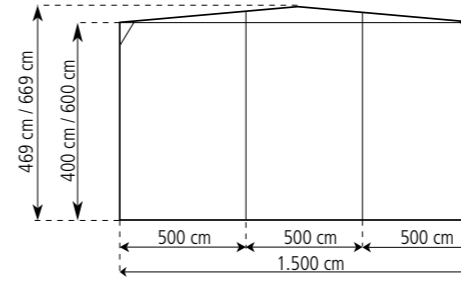



2.000/400/494 & 2.000/600/694

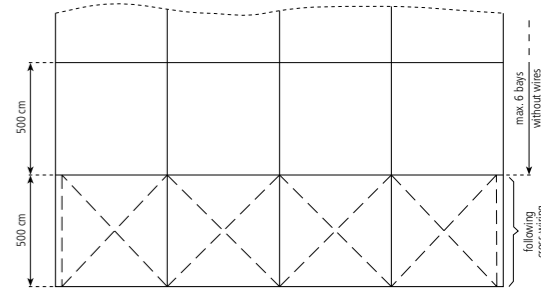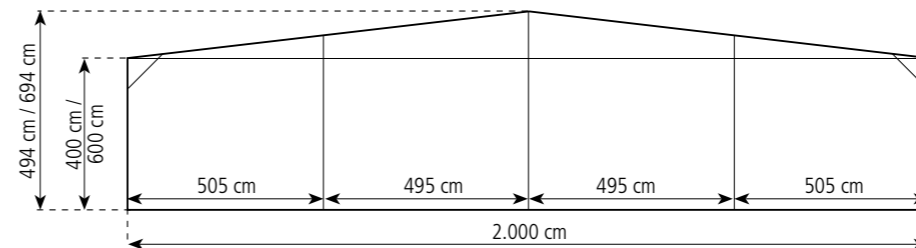

2.500/400/515 & 2.500/600/715

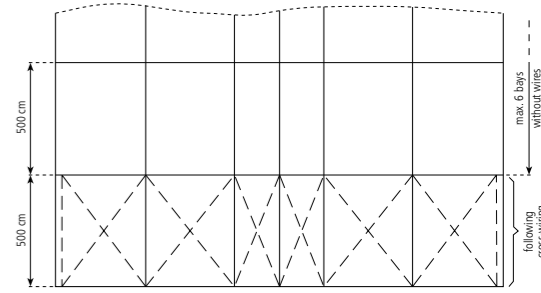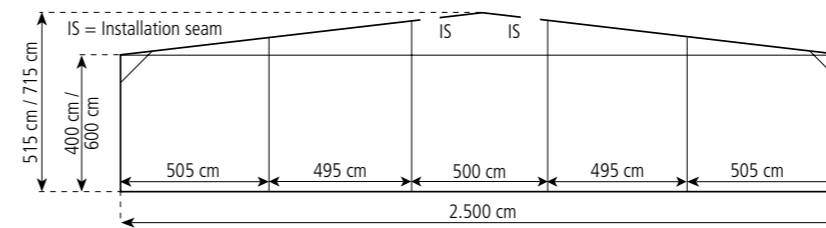

3.000/400/534 & 3.000/600/734

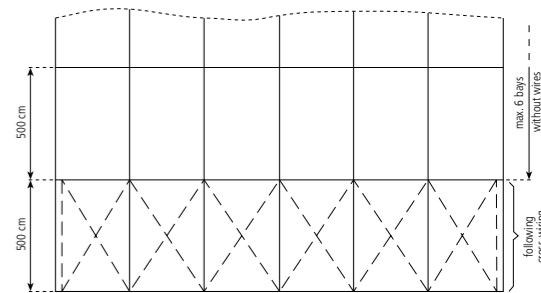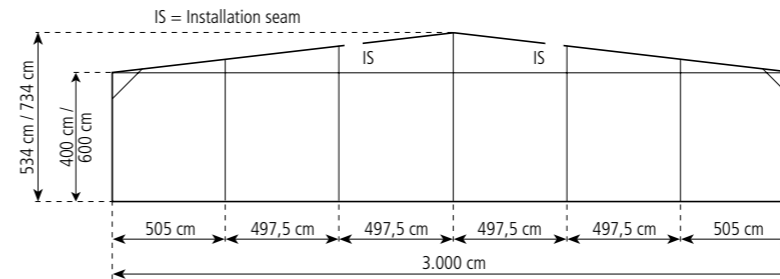

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.