

H-TENTS



Chinese

English

French

German

Hungarian

Italian

Russian

Slovenian

Spanish

Turkish

mobile space solutions
www.roder.com



RÖDER H-TENTS REQUIREMENTS & SOLUTIONS

500 m² USABLE AREA	300 m² USABLE AREA	700 m² USABLE AREA	1.100 m² USABLE AREA	120 m² USABLE AREA	600 m² USABLE AREA
4 Days TIME FRAME	3 Days TIME FRAME	2 Days TIME FRAME	4 Months TIME FRAME	3 Months TIME FRAME	2 Days TIME FRAME
120 PERSONS	400 PERSONS	200 PERSONS	200 guest per day PERSONS	ca. 150 guests per day PERSONS	800 VISITORS
10,0 x 30,0 m HOLIDAY Uno TENT TYPE	8,0 x 27,0 m FIESTA Party tent TENT TYPE	10,0 m HOLIDAY Hexagon with Highpoint TENT TYPE	8,0 m HOLIDAY Hexagon 4,0 x 4,0 m RÖDER HIGHLIGHT (4 Pcs.) TENT TYPE	6,0 x 15,0 m HOLIDAY Party tent TENT TYPE	8,0 x 33,0 m FIESTA Party tent 3,0 x 3,0 m RÖDER HIGHLIGHT (5 Pcs.) TENT TYPE
Glass facade Interior cladding Compact floor system EQUIPMENT	Anniversary of a regional sports club	Full-Service EQUIPMENT	High roof Live-Cooking-Station EQUIPMENT	Side height 3,0 m Solid facade EQUIPMENT	Anchor-free setup EQUIPMENT
Private wedding in Switzerland		25-years company anniversary in a stylish ambience	Extension of a restaurants for summer season	Expansion of the sales area for garden furniture	Street festival



» HANDY AND FLEXIBLE

Due to the flexible and modular spans, lengths and heights of the tent systems RÖDER H-TENTS series are the perfect space solution for small to medium requirements.



RÖDER H-TENTS

FLEXIBLE AND MOBILE

RÖDER H-TENTS persuade visually, economically and with safety. Due to the flexible and modular spans, the modular dimensions of 3.0 or 5.0 meters and height of 2.3 meters and 3.0 meters, the tent systems can be used in many ways. Due to the sustainable mobility, their elaborate designs and innovative details the tent system can be quickly and easily assembled and installed at almost any location within a very short time.

The tent systems include the **HOLIDAY party tent, HOLIDAY Hexagonal, HOLIDAY Uno and the FIESTA, FIESTA party Tent and FIESTA Hexagonal**. In addition, the RÖDER Group offers an extensive range of accessories for extensions and options. Its portfolio ranges of facade elements, special doors and gates, various plan versions above ground, heating and lighting systems to custom-made furnishings.

Come and speak to us in person to find out which tent or marquee system best meets your requirements. The RÖDER team looks forward to helping you find the perfect accommodation!



» WIDE RANGE OF APPLICATIONS

RÖDER H-TENTS provide space for the design and realization of ideas and projects. By combining with other RÖDER tent and hall systems as well as diverse and variable expansions, new opportunities for impressive space solutions arise.



POSSIBLE APPLICATIONS

**FAMILY EVENT SPORTFESTIVAL RIDING BOXES
CONCERTS COMPANY EVENTS ANNIVERSARY FAIRS
PRODUCT PRESENTATIONS FESTIVALS VIP-EVENTS
CORPORATE-EVENTS SALES PROMOTION EXHIBITIONS EVENTS
FESTIVALS SPORT EVENTS SUMMER FESTIVALS
SPECIAL SALES CAMPAIGN GALERIES MARKETS ROADSHOWS
FASHION SHOWS CATERING CONGRESSES MARRIAGES
CITY FESTIVALS STORAGE SHELTER GASTRONOMY
ROOFING CANTEENS SALES ROOM LOCKER BAR DORM
WORKSHOP PRODUCTION THEATRE CLUB ENTERTAINMENT**

THE SYSTEM FOR MORE ROOM

The modular design of RÖDER H-TENTS is effective and efficient thanks to the wide range of possible uses. The tent and marquee systems offer the right accommodation for individual and extraordinary requirements and occasions.

EFFECTIVE AND EFFICIENT





» RÖDER INSPIRES



CREATIVE AND
STIMULATING



VARIANTS

1. Holiday Party tent

Spans
4,0 m | 6,0 m | 8,0 m
10,0 m | 12,0 m | 15,0 m



2. Holiday Hexagonal

Spans
4,0 m | 6,0 m | 8,0 m
10,0 m



3. Holiday Uno

Span
10,0 m



4. Fiesta Party tent

Spans
4,0 m | 5,0 m | 5,88 m
8,0 m | 10,0 m



5. Fiesta Hexagonal

Spans
4,0 m | 5,0 m | 5,88 m
8,0 m | 10,0 m



INFORMATION

All tent variations are available with different side panels. With the grid they are each about 3.0 or 5.0 m extendable. Individual spans, lengths, side heights and grid dimensions are possible as a special order. Detailed information is described in the technical data sheet on the following pages.





TECHNICAL DATA



HOLIDAY PARTY TENT

STANDARD VERSION			
Span	400 cm	600 cm	800 cm
Side height	230 / 300 cm	230 / 300 cm	230 / 300 cm
Ridge height	295 / 365 cm	328 / 398 cm	360 / 430 cm
Roof pitch	18°	18°	18°
Bay distance / grid	300 / 500 cm	300 / 500 cm	300 / 500 cm
Longest component at grid 300 cm	375 / 420 cm	375 / 418 cm	429 / 429 cm
Longest component at grid 500 cm	549 / 580 cm	549 / 580 cm	549 / 580 cm
Main profile	110 x 68 x 3 mm		
Gable column	0	1	1
Corner connections	Stem bolts		
Min. setup length at grid 300 cm	600 cm	600 cm	600 cm
Min. setup length at grid 500 cm	1.000 cm	1.000 cm	1.000 cm
Max. setup length	Expandable with the grid		
Max. wind speed to EN	80 km/h		
Special design	Elimination of the wall diagonal through the installation of portals		
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette flooringCompact floor		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		



400/230/295 & 400/300/365

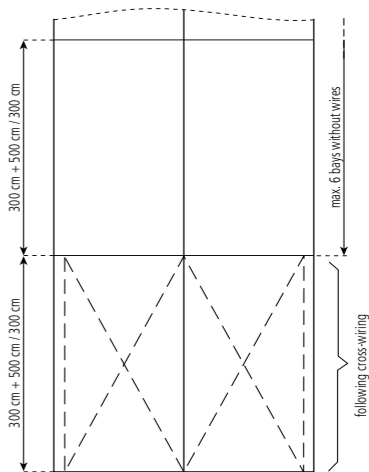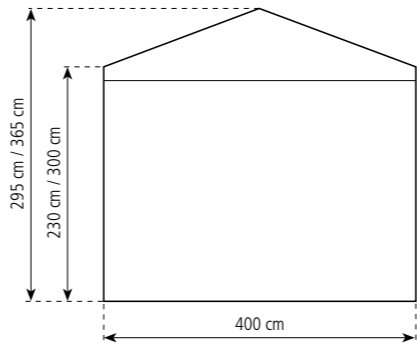

600/230/328 & 600/300/398

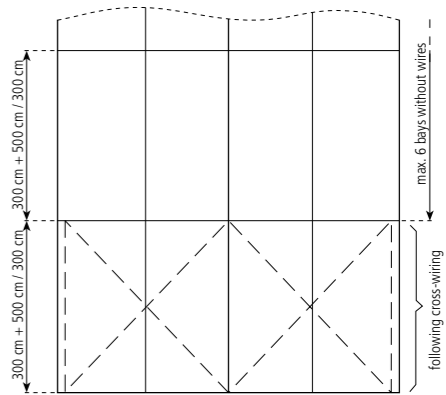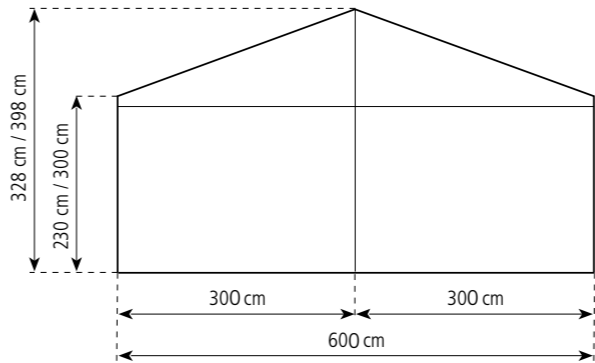

800/230/360 & 800/300/430

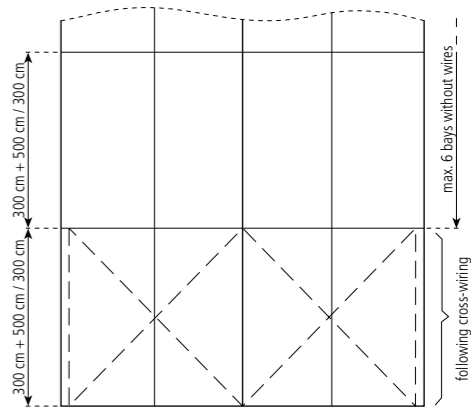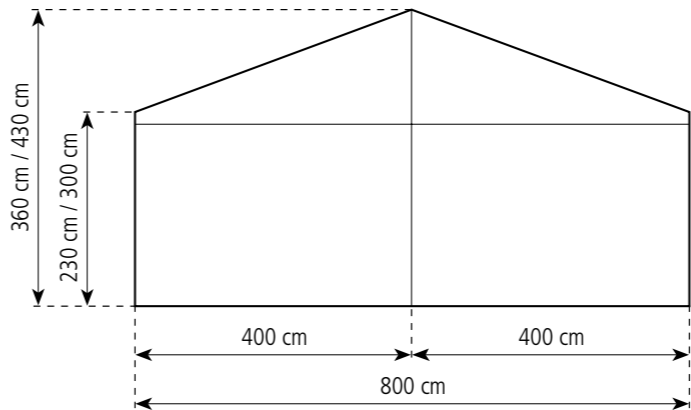

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.




TECHNICAL DATA


HOLIDAY PARTY TENT

STANDARD VERSION			
Span	1.000 cm	1.200 cm	1.500 cm
Side height	230 / 300 cm	230 / 300 cm	230 / 300 cm
Ridge height	393 / 462 cm	425 / 495 cm	474 / 542 cm
Roof pitch	18°	18°	18°
Bay distance / grid	300 / 500 cm	300 / 500 cm	300 cm
Longest component at grid 300 cm	538 cm	538 cm	538 cm
Longest component at grid 500 cm	549 / 580 cm	549 / 580 cm	549 / 580 cm
Main profile	110 x 68 x 3 mm		
gable column	1	2	2
Corner connections	Stem bolts		
Min. setup length at grid 300 cm	600 cm	600 cm	600 cm
Min. setup length at grid 500 cm	1.000 cm	1.000 cm	1.000 cm
Max. setup length	Expandable with the grid		
Max. wind speed according to EN	80 km/h		
Special design	Elimination of the wall diagonal through the installation of portals		
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette flooringCompact floor		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		


1.000/230/393 & 1.000/300/462

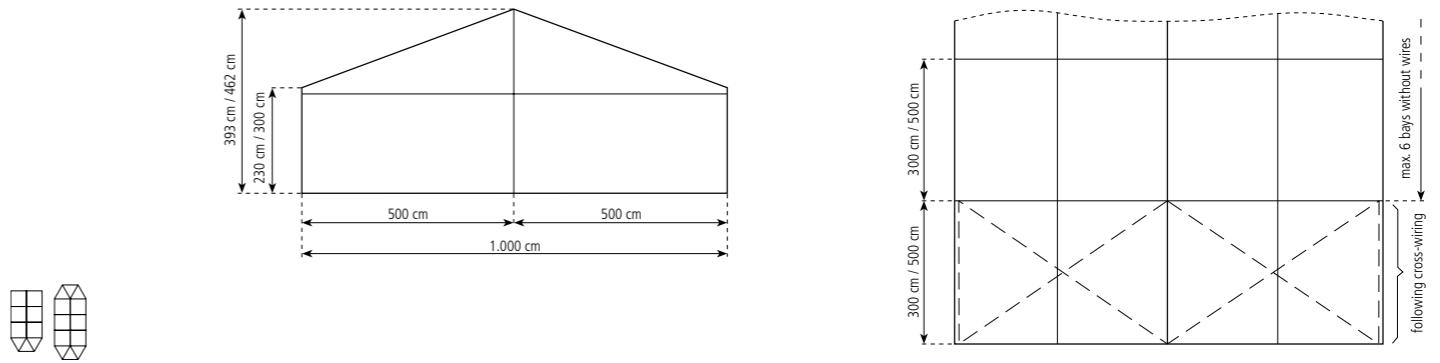

1.200/230/425 & 1.200/300/495

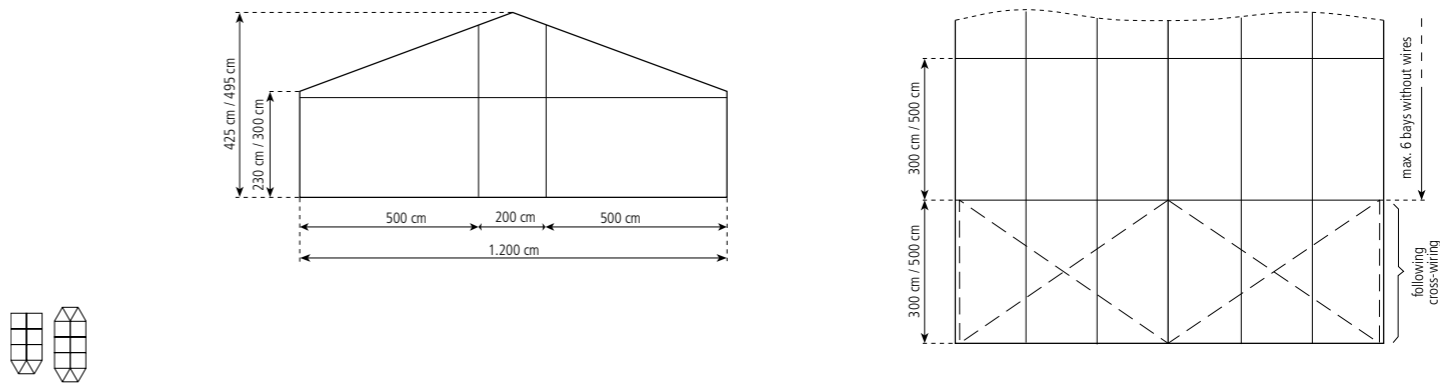

1.500/230/474 & 1.500/300/542

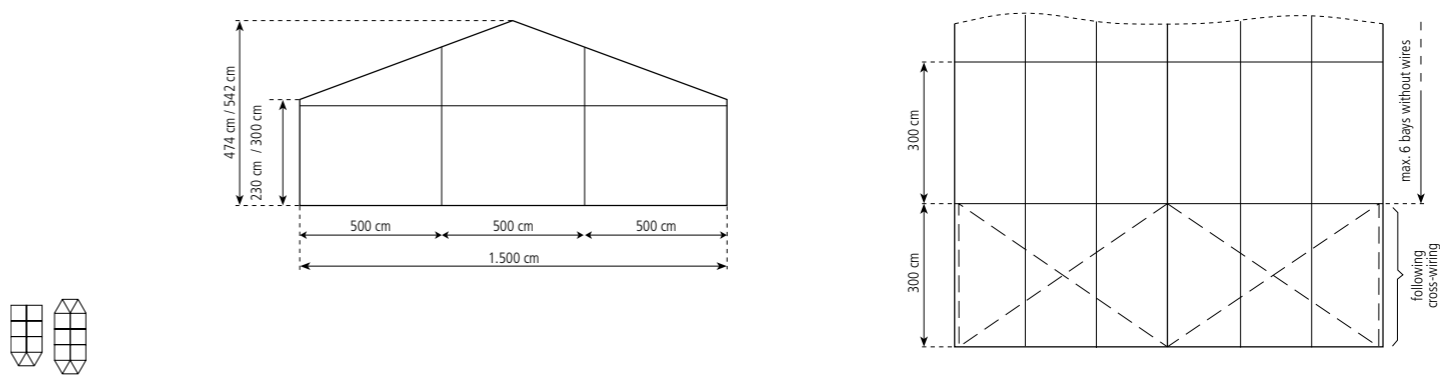

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.





TECHNICAL DATA

HOLIDAY UNO

STANDARD VERSION	
Span	1.000 cm
Side height	230 cm
Ridge height	393 cm
High point	593 cm
Roof pitch	18°
Bay distance / grid	300 / 500 cm
Longest component at grid 300 cm	534 cm
at grid 500 cm	549 cm
Main profile	110 x 68 x 3 mm
Gable column	1
Corner connections	Stem bolts
Min. setup length at grid 300 cm	600 cm
at grid 500 cm	1.000 cm
Max. setup length	Expandable with the grid
Max. wind speed according to EN	80 km/h
Special Design	Elimination of the wall diagonal through the installation of portals
Floor	<ul style="list-style-type: none">• Wood floor with timber or steel-aluminum substructure• Cassette flooring• Compact floor
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204

1.000/230/593

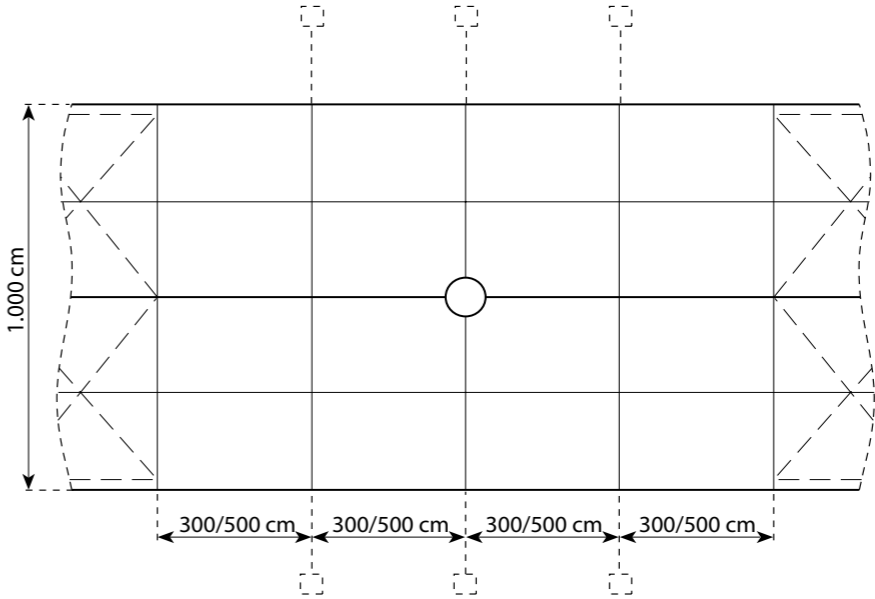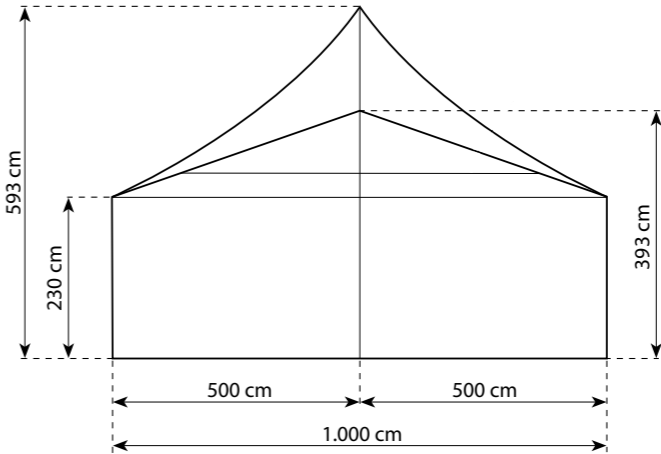

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.






TECHNICAL DATA




HOLIDAY HEXAGONAL

STANDARD VERSION				
Span	400 cm	604 cm	800 cm	1.000 cm
Side height	230 cm	230 cm	230 cm	230 cm
Side length	200 cm	302 cm	400 cm	500 cm
Ridge height pavilion roof	295 cm	328 cm	360 cm	393 cm
Ridge height membrane roof	385 cm	418 cm	560 cm	593 cm
Roof pitch	18°	18°	18°	18°
Covered area	10,4 m²	23,7 m²	41,6 m²	65 m²
Longest component	296 cm	326 cm	455 cm	545 cm
Main profile	110 x 68 x 3 mm			
Corner connections	Stem bolts			
Max. wind speed according to EN	80 km/h			
Special design	Elimination of the wall diagonal through the installation of portals			
Can be used as pavilion roof with intermediate fields	yes see Party tent Holiday (400/230/295 and 604/230/328)		yes see Party tent Holiday (800/230/360 and 1.000/230/393)	
Floor	<ul style="list-style-type: none">Wood floor with timber or steel-aluminum substructureCassette flooringCompact floor			
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204			

400/230/295 & 604/230/328

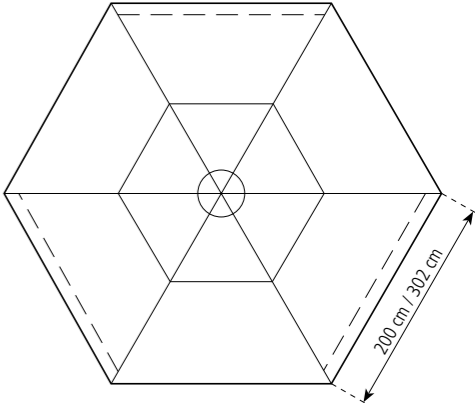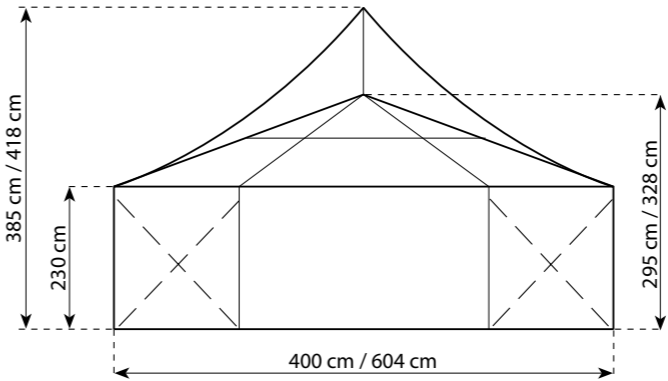

800/230/360 & 1.000/230/393

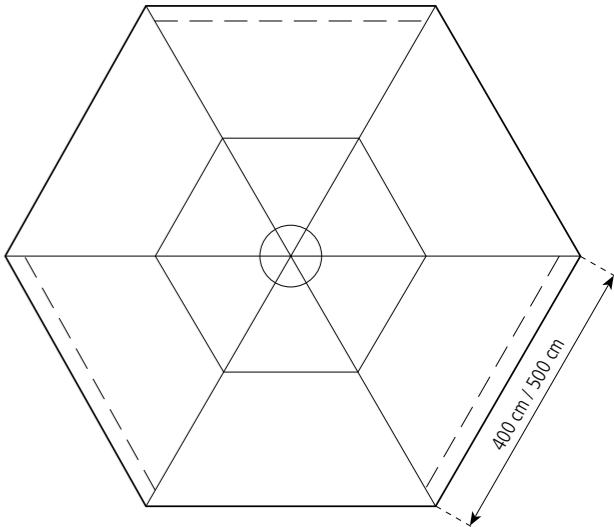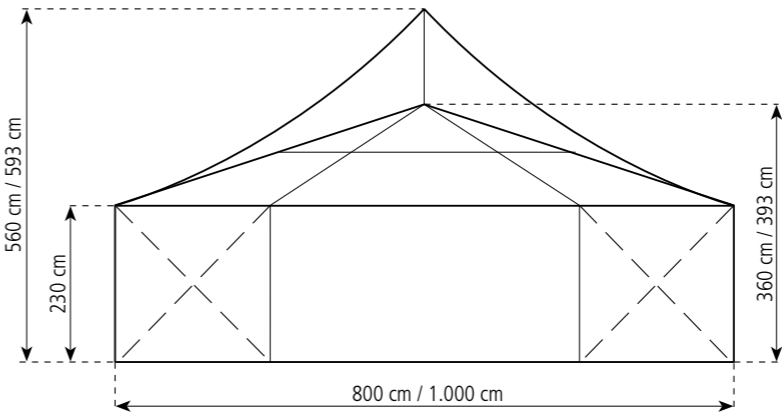

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.




TECHNICAL
DATA


FIESTA PARTY TENT

STANDARD VERSION					
Span	400 cm	500 cm	588 cm	800 cm	1.000 cm
Side height	225 cm	225 cm	225 cm	225 cm	225 cm
Ridge height	290 cm	306 cm	321 cm	355 cm	387 cm
Roof pitch	18°	18°	18°	18°	18°
Bay distance / grid	300 cm	300 cm	300 cm	300 cm	300 cm
Longest component	373 cm	373 cm	373 cm	428 cm	533 cm
Main profile	94 x 46 x 2/4 mm				
Gable column	0	0	1	1	1
Corner connection	Stem bolts				
Min. setup length	300 cm with portal 600 cm			800/1.000 cm with portal 900 cm	
Max. setup length	Expandable with the grid				
Max. wind speed according to EN	80 km/h				
Special design	Elimination of the wall diagonal through the installation of portals				
Floor	<ul style="list-style-type: none">• Wood floor with timber or steel-aluminum substructure• Cassette flooring• Compact floor				
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204				

400/225/290 & 500/225/306

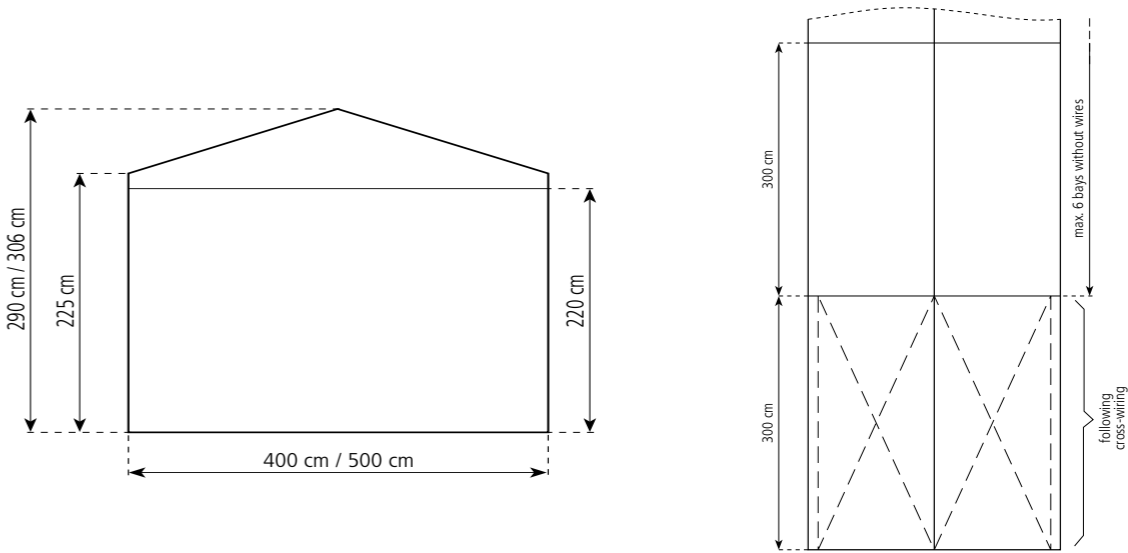

588/225/321 & 800/225/355 & 1.000/225/387

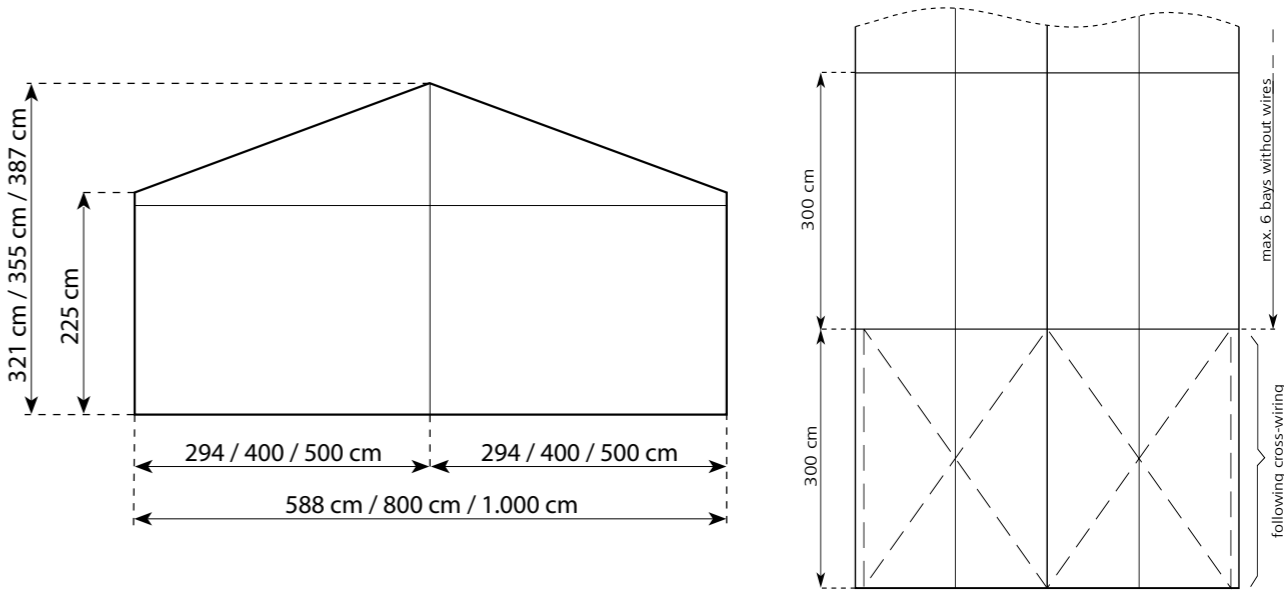

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.





TECHNICAL DATA



FIESTA HEXAGONAL

STANDARD VERSION					
Span	400 cm	500 cm	588 cm	800 cm	1.000 cm
Side height	225 cm	225 cm	225 cm	225 cm	225 cm
Side length	200 cm	250 cm	294 cm	400 cm	500 cm
Ridge height pavilion roof	290 cm	306 cm	321 cm	355 cm	387 cm
Ridge height membrane roof	396 cm	413 cm	427 cm	571 cm	604 cm
Roof pitch	18°	18°	18°	18°	18°
Covered area	10,4 m²	16,2 m²	22,5 m²	41,6 m²	65 m²
Longest component	297 cm	333 cm	367 cm	457 cm	546 cm
Main profile	94 x 46 x 2/4 mm				
Corner connections	Stem bolts				
Max. wind speed according to EN	80 km/h				
Special design	Elimination of the wall diagonal through the installation of portals				
Can be used as pavilion roof with intermediate fields	yes see Party tent Fiesta (400/255/290 and 500/225/306)		yes see Party tent Fiesta (500/255/321 and 800/225/355 and 1.000/225/387)		
Fußboden	<ul style="list-style-type: none">• Wood floor with timber or steel-aluminum substructure• Cassette flooring• Compact floor				
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204				

400/225/290 & 500/225/306

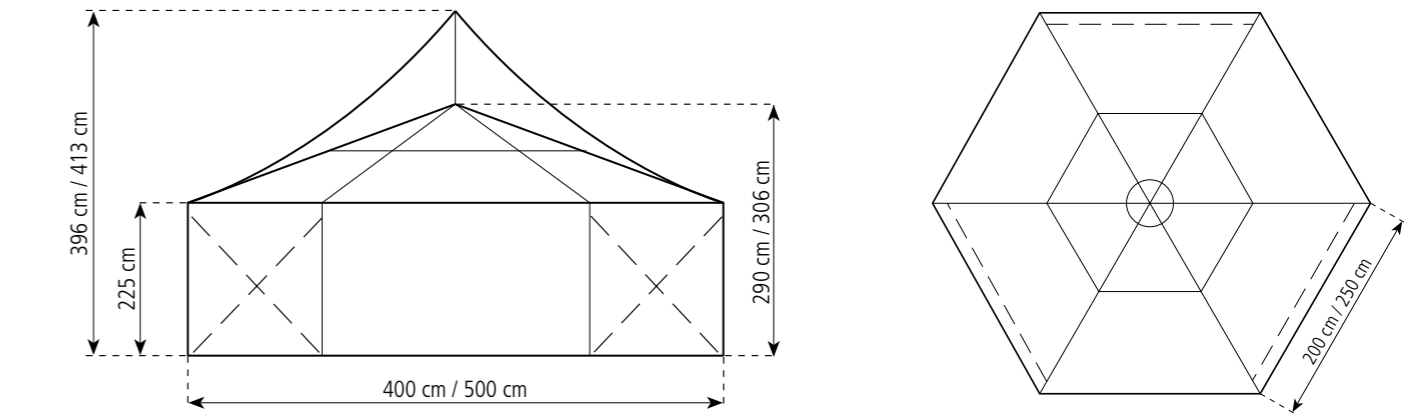

588/225/321 & 800/225/355 & 1.000/225/387

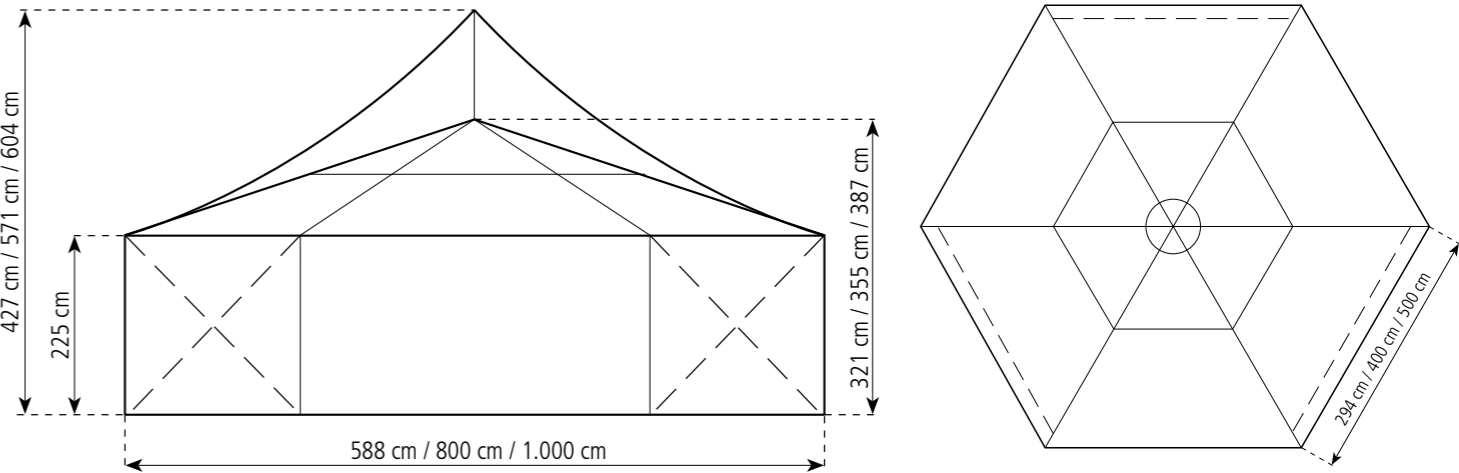

QUESTIONS AND COMMENTS

We have provided you with a summary of the main data and measurements of our standard constructions. No guarantee can be made for the accuracy of the information given. We cannot be held liable for printing or spelling errors. We would be happy to meet with you personally to help you find the perfect accommodation to match your requirements. If you have any questions on further measurements, specialist constructions, extensions or remodeling, or if you require further technical data, the RÖDER team will be happy to help.



EQUIPMENT FEATURES

FLEXIBLE AND MODULAR

WELL THOUGHT STABILITY

The RÖDER H-TENTS can be quickly and easily assembled and disassembled by stable and solid connection elements. The well-designed combination of supporting and connecting elements guarantees a proven high level of structural stability. Many optional pieces of equipment and tent components can be added to the standard scope of delivery. Everything from the floor system, framework, terraces, galleries, cladding right up to the roof tarpaulins can all be customised to make the tent and marquee systems individual. RÖDER H-TENTS are flexible and modular by its extensive equipment options.



1. Stability

RÖDER guarantees a high level of stability on almost any terrain.

2. Connections

Easy and safe: The bolt connections of RÖDER H-TENTS

3. Expander hook

The recessed expander hook protects the profile against transport damage and optimizes the handling.

4. Track rollers

Track rollers allow you to quickly open and close the side tarpaulins

6. Accessories

Exclusive accessories such as the various facades, door systems or transparent side and roof tarpaulin lead to an impressive ambience



INCLUDED IN DELIVERY

Frame construction with anodised aluminum profiles

White roof tarpaulins with fixed hem and bungee tensioning

White side tarpaulins with central divisions

Ground bars for the side tarpaulins

Pegs, setup tube and mounting rope



SPECIAL EQUIPMENT

Windows for the side tarpaulins

Various floor and facade systems

Various ways of setting up or remodeling the tents

Arch-shaped bars instead of diagonal bars

Different types of doors and entrances

Fixed anchors for the roof tarpaulins

Interior decoration and lighting

DESCRIPTION OF FRAME MATERIAL

Anodized and high strength aluminum profile

Connecting elements made of aluminum and galvanised steel

DESCRIPTION OF TARPAULIN MATERIAL

RÖDER No. 1, PVC-coated tarpaulins produced in line with DIN 18204

Classified as ‘difficult to ignite’ by DIN 4102 and EN 13501

Dirt-repellent and light-fast

Lets daylight through and UV-resistant

Low-wick coated polyester threads

TECHNICAL FEATURES

DURABLE AND HIGH-QUALITY

DECADES OF EXPERIENCE

The RÖDER Group uses only the most qualified staff, the best materials and constantly draws on its decades of experience in the field of temporary accommodation – right from the very start of the construction and production process of the tent and marquee systems. We achieve high customer satisfaction through quality and safety. Continuous and reliable quality management means we can place our trust in the materials we use. The RÖDER Group is certified according to the European standards EN ISO 9001:2008 and EN ISO 14001:2009. All structures are calculated and tested in accordance with the European standard EN 13782.



3. Logistics
Specialist partners take on the task of transporting the tent and marquee systems. As a trusted and known dispatcher, RÖDER benefits from a fast-track customs clearance process. This guarantees a just-in-time availability worldwide.

4. Production
RÖDER production is respectful to both people and the environment – worldwide.



1. Construction
The modular design principle allows various types of construction and expansion.

2. Equipment
RÖDER offers many exclusive types of facades and equipment to go with its tent and marquee systems.



The anodised aluminum frame is equipped with highly secure profiles and has two- or four-channel keder technology. The sophisticated keder technology makes it possible to expand the tents in many different ways – using the modular design principle. The keder technology also provides protection against bad weather and storms. Highly secure aluminium alloys and galvanized steel guarantee a long-life hold.

RÖDER conducts the planning in line with the minimum quality standards laid down by the DIN 18204 product certification. The long-life RÖDER No.1 tarpaulins are equipped with polyester threads that have a special low-wick and PVDF coating. This increases their resistance against bad weather, prevents dirt building up on the surface and damp getting through. The tarpaulins are classified as 'difficult to ignite' by the standards DIN 4102 and EN 13501, are resistant against fungus and spores (fungicidal), and are UV-proof.

The tents guarantee easy handling as they are quick and easy to set up, do not take up much storage or transport space, and the highly secure aluminium profiles are lightweight. The installation and dismantling of the tents will not demand too much manpower or incur high costs.

FULL-SERVICE



TARPAULINS & FACADE SYSTEMS



FLOOR SYSTEMS



STAIRS, BALCONIES, GALERIES & RAILINGS



SECURITY SYSTEMS



LIGHTING



KITCHEN & SANITARY INSTALLATIONS



INTERIOR, CLADDING & DECORATION



FENCE, SEPARATION & FLAG SYSTEMS

DIVERSE AND VARIABLE



HEATING & AIR CONDITIONING SYSTEMS



DOOR & GATE SYSTEMS



ISO 9001:2008
ISO 14001:2009
REGISTERED FIRM

ENGINEERED IN
GERMANY

QUALITY MANAGEMENT

IN ALL PROCESSES, WE ENSURE THAT THE HIGHEST QUALITY AND SAFETY STANDARDS ARE COMPLIED WITH IN ORDER TO PROTECT OUR CUSTOMERS AND TO OFFER THEM THE BEST-LOOKING PRODUCT WITH THE BEST MATERIALS. THIS IS WHY QUALITY, SAFETY AND DURABILITY ARE FIRM COMPONENTS OF RÖDER'S COMPANY CULTURE.

In order to optimise production and business processes and to maintain all safety guidelines so as to guarantee product quality and customer satisfaction, the RÖDER Group employs consistent, sustainable and thorough quality management. The concept of our quality management is based on internal and external input. All relevant processes are defined and documented – from the design phase, material selection and project planning right up to when the tent and marquee systems are given to the customers. As a high-end manufacturer, 'Engineered in Germany and 'Made by RÖDER' is our promise of quality to our customers. Both our design expertise and quality management are therefore pivotal for the success of our products and trust of our customers.

The quality management systems, which are tested and certified in accordance with the **European standards EN ISO 9001:2008** and **EN ISO 14001:2009**, relate to the design, construction, production, sale and hiring out of RÖDER tent and marquee systems. In order to guarantee the quality promised by the RÖDER Group, all members of staff take part in regular external and internal training on quality and safety. All our temporary accommodation is inspected by TÜV in terms of construction, structure and the tarpaulins. In addition, the company receives external advice and supervision from Bavarian-based company inspectors, the **LGA (Landesgewerbeanstalt Bayern)**.

SUSTAINABLE AND
ECOLOGICAL



BENEFITS AND ADDED VALUE OVERVIEW

INSTALLATION AND EXTENSION BY THE MODULAR DESIGN
SOLID AND RELIABLE CONNECTION ELEMENTS
CALCULABLE STORAGE AND TRANSPORT COSTS
EASY AND QUICK INSTALLATION
EXPANDABLE BY GRID SYSTEM
FACADES AND FLOOR SYSTEMS
EXCELLENT VALUE FOR MONEY DIFFERENT SIDE COVERS
EXCLUSIVE RECONSTRUCTION VARIANTS
EXPERT ADVICE IN ALL PHASES OF THE PROJECT
CERTIFIED QUALITY AND SAFETY
EXTENSIVE SERVICE AND SERVICE-SUPPLY OFFER
DIVERSE APPLICATION POSSIBILITIES
MANY YEARS OF EXPERTISE OF QUALIFIED EMPLOYEES
FLEXIBLE AND MODULAR EQUIPMENT
ENGINEERED AND MADE IN GERMANY
DURABLE AND HIGH QUALITY MATERIALS
A TENT AND HALL SYSTEMS OF RÖDER

RÖDER WORLDWIDE

- Headquarters
- RÖDER subsidiary with its own production facilities and rental warehouse
- RÖDER subsidiary with its own rental warehouse
- RÖDER Sales office
- RÖDER Partner

GERMANY (HEADQUARTERS)

RÖDER
Zelt- und Veranstaltungsservice GmbH
Am Lautenstein, 63654 Büdingen
Fon + 49 60497000
Fax + 49 6049700339
info@roder.com
www.roder.com

1

ALGERIA (PARTNER)
ASTALAVISTA SARL
06, Rue Abd El Kader Guellati
Cinq Maisons, El Mohammadia,
Alger
Fon + 213 21525738
Fax + 213 21525737
info@roder.com
www.astalavista-dz.com

2

ARGENTINA (PARTNER)
Roggerone SRL,
Av. Santa Fé 2665-1640 Martinez,
Pcia de Buenos Aires, Argentina
Fon + 54 1147925422
Fax + 54 1147934113
info@roder.com
www.roggerone.com

3

AUSTRIA (SUBSIDIARY)
RÖDER Zelte Austria
Gartenstraße 30a
AT-4201 Gramastetten, Austria
Fon + 43 7239 70024
Fax + 43 7239 70024
info@roder.com
www.roder.com

4

AUSTRALIA (PARTNER)
H-Line Structures Australia
P.O. Box 8009, Toowoomba
AU-4350 Queensland, Australia
Fon + 61 754451300
Fax + 61 754458027
info@roder.com
www.hlinestructures.com.au

5

CHILE (PARTNER)
Bodegajes Temporales Limitada
Patricia Viñuela 578-C
CL-Lampa Santiago, Chile
Fon + 56 27385638
Fax + 56 27385639
info@roder.com
www.btcbodegajes.cl

6

CHINA-PEKING (SUBSIDIARY)
RODER Tent Service
(Beijing) CO., Ltd
Rm. 311 Sanchuan Dasha
3 Hepingli Xijie, Chaoyang Qu
100013 BEIJING, P. R. China
Fon + 86 10644055-71 | -72
Fax + 86 1064405219
info@roder-china.com
www.roder-china.com

7

CHINA-SHANGHAI (SUBSIDIARY)
RÖDER Tent Service
(Shanghai) CO., Ltd
No. 3978 Hu Qingping Road,
Qingpu district, CN-201703
Shanghai, China
Fon + 86 2151099228
Fax + 86 21398126 07
info@roder-china.com
www.roder-china.com

8

COLOMBIA (PARTNER)
Bodegajes Temporales Colombia S.A.S
Cr 7 71 Torre B floor 9
Bogotá, Colombia
Fon + 57 3115870731
celeon@btcbodegajes.com.co
www.btcbodegajes.cl

9

CZECH REPUBLIC (PARTNER)
Diamant Expo
Marie Kršňákové 119
403 17 Chabařovice, Czech Republic
Fon + 42 04752147934
Fax + 42 0475214793
info@roder.com
www.roeder.cz

10

FINLAND (PARTNER)
Siirtohallit Oy
Puusepäntie 11
04360 Tuusula
Finland
Fon +35 8400913913
info@roder.com
www.siirtohallit.fi

11

FRANCE (SUBSIDIARY)
RÖDER France SARL
ZI No. 2 · 28, Allée Monge
FR-60 000 Beauvais, France
Fon + 33 344028877
Fax + 33 344053926
info@roder.fr
www.roder.com

12

GREECE (PARTNER)
Con.Tent Ltd.
Kifissias Avenue 198
GR-15231 Halandra-Athens, Greece
Fon + 30 2106754720
Fax + 30 2106754722
info@roder.com
www.con-tent.gr

13

HUNGARY (SUBSIDIARY)
RÖDER GmbH Magyarországi
Közvetlen Kereskedelmi, Képviselete
Széchenyi tér 21-23 III/6
HU-6900 Makó,
Hungary | Magyarország
Fon + 36 62212071
Fax + 36 62212071
info@roder.com
www.roeder.hu

14

ITALY (SUBSIDIARY)
RÖDER Italia SRL
Via Stazione 27/a
IT-39042 Bressanone, Italy
Fon + 39 0472830939
Fax + 39 0472832909
info@roder.com
www.roder.com

15

MALAYSIA (PARTNER)
Sebsat Malaysia Sdn Bhd
Lot 50321, Jalan KPb 1,
Kawasan Perindustrian Budiman
Batu 10 3/4, 43200 Cheras, Selangor,
Malaysia
Fon + 60 390802640
Fax + 60 390801640
ceo_sebsat@yahoo.com
www.roder.com

16

MOROCCO (PARTNER)
Grand Chapiteau
15, rue Oued Sebou Agdal
1000 Rabat - Maroc
Fon + 33 344028877
Fon + 33 344053926
info@roder.fr
www.roder.com

17

MEXICO (SUBSIDIARY)
Roeder de México S.A. de C.V.
Mariano Escobedo # 193
Torre Norte, Of. 1304
Col. Anáhuac I Secc.,
Del. Miguel Hidalgo C.P. 11320 - México D.F.
Fon + 52 7282823845
info@roder.com
www.roder.com.mx

18

NEW ZEALAND (PARTNER)
H-Line Structures
9A Taylor Rd
NZ-Papamoa, Bay of Plenty 3118,
New Zealand
Fon + 61 754451300
Fax + 61 754458027
info@roder.com
www.hlinestructures.com.au

19

PERU (PARTNER)
Btp Almacenes S.A.C
Ricardo Palma 1250
Miraflores – Lima, Perú
Fon + 51 948902070
info@roder.com
www.btcbodegajes.cl

20

ROMANIA (PARTNER)
Str. Buzesti Nr. 61, Et. 7,
Ap. 48-49, Sector 1,
RO-011013 Bukarest, Romania
Fon + 40 213110011
Fax + 40 213110011
info@roder.com
www.roeder.ro

21

RUSSIAN FEDERATION (SUBSIDIARY)
RÖDER OOO
Solnechnogorskiy district,
Village Lunevo, Garazhnaya street
opposite No. 16
RU-141580 Moskau, Russia
Fon + 7 4957858157
Fax + 7 4957858158
roder@roder.ru
www.roder.ru

22

SLOVENIA (PARTNER)
Expo Biro d.o.o.
Miklavška cesta 57
SL-2311 Hoce, Slovenia
Fon + 38 624805800
Fax + 38 62480580 20
info@roder.com
www.expobiro.si

23

SPAIN (PARTNER)
Foro Técnico S.L., Orient 78-84
ES-08172 St. Cugat del Valles
Barcelona, Spain
Fon + 34 935441860
Fax + 34 935441861
info@roder.com
www.forotec.com

24

SWEDEN (PARTNER)
One4Event AB
Hemgatan 2
SE-78473 Borlänge, Sweden
Fon + 46 243794360
Fax + 46 243794369
info@roder.com
www.one4event.com

25

SWITZERLAND (SUBSIDIARY)
Orgatent AG
Gewerbe Badhus
CH-6022 Grosswangen,
Switzerland
Fon + 41 419804939
Fax + 41 419804919
info@orgatent.ch
www.orgatent.ch

26

TURKEY (SUBSIDIARY)
RÖDER Yapi Sistemleri
Sanayi Ticaret Ltd. Sti
Akasya Acıbadem
Çeçen Sokak, Kent Etabı A Kule Kat:18 D:62
TR-34660 Üsküdar/Istanbul, Turkey
Fon + 90 2163408910
Fax + 90 2163408915
info@roder.com.tr
www.roder.com.tr

27

UKRAINE (PARTNER)
Tent Plettac Ltd.
Plodova Str., 1
UA-4128 Kyiv, Ukraine
Fon + 38 0444000461
Fax + 38 0444222145
info@tent-plettac.com
www.tent-plettac.com

28

UNITED KINGDOM (SUBSIDIARY)
RÖDER UK Ltd.
Unit 16 Earith Business Park
Meadow Drove, Earith,
Cambridgeshire
GB-PE28 3QF, United Kingdom
Fon + 44 1487840840
Fax + 44 1487840843
sales@roderuk.com
www.roderuk.com

29

USA (PARTNER)
Anchor Industries Inc.
1100 Burch Dr., P.O. Box 3477 Evansville,
Indiana 47733, USA
Fon + 1 8128672421
Fax + 1 8128670547
info@roder.com
www.anchorinc.com

30

19



RÖDER ZELT- UND VERANSTALTUNGSSERVICE GMBH
AM LAUTENSTEIN, 63654 BÜDINGEN (GERMANY)

FON +49 6049 700 0
FAX +49 6049 700 339

INFO@RODER.COM
WWW.RODER.COM



Mistakes, image errors, price alterations, technical modifications
and dimension discrepancies reserved.